

NEW 2026 – ZEG KEG BASIC

Brown one-way KEGs

Safe, practical, and modern beverage solution

- ✓ professional packaging for wine, beer, and soft drinks
- ✓ dark brown color – beverage protection against UV light
- ✓ easy handling
- ✓ PET material
- ✓ highly durable, ready for use
- ✓ suitable for export and domestic markets too
- ✓ volumes: 10, 20, and 30 liters



ZEGKEG BASIC



DESIGN AND CONSTRUCTION

- ✓ ergonomic handle for easy manipulation
- ✓ fitting types: A (flach), S (corb)
- ✓ stable base / no box required, KEG is stackable
- ✓ elegant and professional appearance

APPLICATIONS

- ✓ wine, beer, cider
- ✓ non-alcoholic beverages, soft drinks
- ✓ specialty beverages, mixed drinks

REQUEST MORE INFO

- ✓ samples
- ✓ technical specifications
- ✓ customized price offer based on annual volume
- ✓ logistics information

LOGISTICS

Parameter	KEG 10L	KEG 20L	KEG 30L
Volume (max. filling)	10 / 10.3 l	20 / 20.3 l	30 / 30.2 l
Dimensions (Ø / height)	246 / 329 mm	242 / 579 mm	296 / 589 mm
Weight – grams/pc	714	914	1 312
Layer capacity (euro-pallet)	15 pcs	15 pcs	11 pcs
Layers per pallet	6 layers	4 layers	4 layers
Total units per pallet	90 pcs	60 pcs	44 pcs

PRODUCT INFO

Parameter	Range / Value
Optimal temperature	+5 °C to +25 °C
Temperature limits	+2 °C to +40 °C
Nitrogen pressure (empty)	1 bar
Max. working pressure	3.5 bar
Burst pressure	> 7 bar



CONTACTS

ADAM & PARTNER, s.r.o.

Radlická office
Radlická 348/142
150 00 Praha 5
+420 222 515 591

Radek Kounický

Project Manager
radek.kounicky@adam-partner.cz
tel.: +420 732 682 682

Zuzana Richterová

Regional Sales Manager
zuzana.richterova@adam-partner.cz
tel.: +420 705 636 969

SAFETY RULES

ZEGKEG
BASIC

HANDLE WITH CARE
www.drinkpackaging.eu • www.smartpetobaly.cz



Read safety instructions before use! Visit web and check ZEG documents.







! Upozornění !
Keg je pod tlakem.
Dodržujte bezpečnostní instrukce!
Pouze pro profesionální použití.
Nepoužívejte opakovaně.
Skladujte do 40 °C!
Předplněno dusíkem.

! Warning !
Pressure in keg.
Follow the safety instructions!
For professional use only.
Do not reuse. Store below 40 °C!
Pre-filled with nitrogen.



Chraň ruce
a oči!
Protect hands
and eyes!





OTHER



HDPE



PET




PP

INNER BAG



OTHER

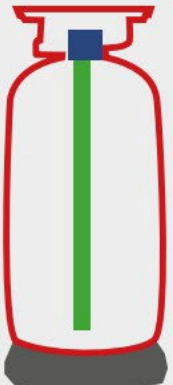

N₂
NITROGEN



Ihned po použití /
vyprázdnění, vyfoukni
tlak na 0 BAR (PSI),
pomocí KEG naražeče
nebo odvětrávacího
šroubu.

Immediately after use /
emptying, release
the pressure using PRV
valve to 0 BAR (PSI),
using the KEG coupler
or pressure release
adapter.

Neplňte ZEG KEG nad uvedený objem, hrozí poškození!
Dodržujte maximální pracovní tlak do 3,5 bar (51 PSI)!
Při vyšším tlaku hrozí nebezpečí!

Do not fill ZEG KEG above the specified volume. It can be damaged.
Maximum working pressure 3,5 bar (51 PSI)!
Higher pressure can be dangerous!

Max. objem CO₂ - 5,5 g/l nápoje
Max. volume CO₂ - 5,5 g/l in drink